

TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



SPECIFICATION

MODULE NO.: WF35UTYAIMNNO#

General Specification

Item	Dimension	Unit
Size	3.5	inch
Dot Matrix	320 x RGB x 480(TFT)	dots
Module dimension	54.5 (W) x 83.0 (H) x 2.46(D)	mm
Active area	48.96 x 73.44	mm
Pixel pitch	0.153 x 0.153	mm
LCD type	TFT, Normally Black, Transmissive	
View Direction	80/80/80/80	
Aspect Ratio	Portrait	
TFT Driver IC	ILI9488 or Equivalent	
TFT Interface	1-Lane MIPI	
Backlight Type	LED, Normally White	
Touch Panel	Without Touch Panel	
Surface	Anti-Glare	

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating conditions:


Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for digital	IOVCC	—	—	1.8/2.8	3.3	V
Supply Voltage for analog	VCI	—	—	2.8	3.3	V
Power Supply for TFT Current	ICC	IOVCC=VCI =VCC=3.3V	—	13.6	—	mA

Interface

LCM PIN Definition

NO	Symbol	Function	I/O
1	VCI	A supply voltage to the analog circuit. Connect to an external power supply of 2.5 ~ 3.3V. Connect to a stabilizing capacitor between VCI and GND.	P
2	IOVCC	A supply voltage to the digital circuit. Connect to an external power supply of 1.65 ~ 3.3V.	P
3	RESET	Reset input signal Initialize the chip with a low input. Be sure to execute a power-on reset after supplying power.	I
4	GND	Ground	I
5	MIPI_CLK_P	Positive polarity of low voltage differential clock signal Leave the pin open when not in use.	I
6	MIPI_CLK_N	Negative polarity of low voltage differential clock signal Leave the pin open when not in use	I
7	GND	Ground	I
8	MIPI_DATA_P	Positive polarity of low voltage differential data signal Leave the pin open when not in use.	I
9	MIPI_DATA_N	Negative polarity of low voltage differential data signal Leave the pin open when not in use.	I
10	GND	Ground	I
11	VLED+	Anode of LED backlight.	
12	VLED-	Cathode of LED backlight	

Contour Drawing

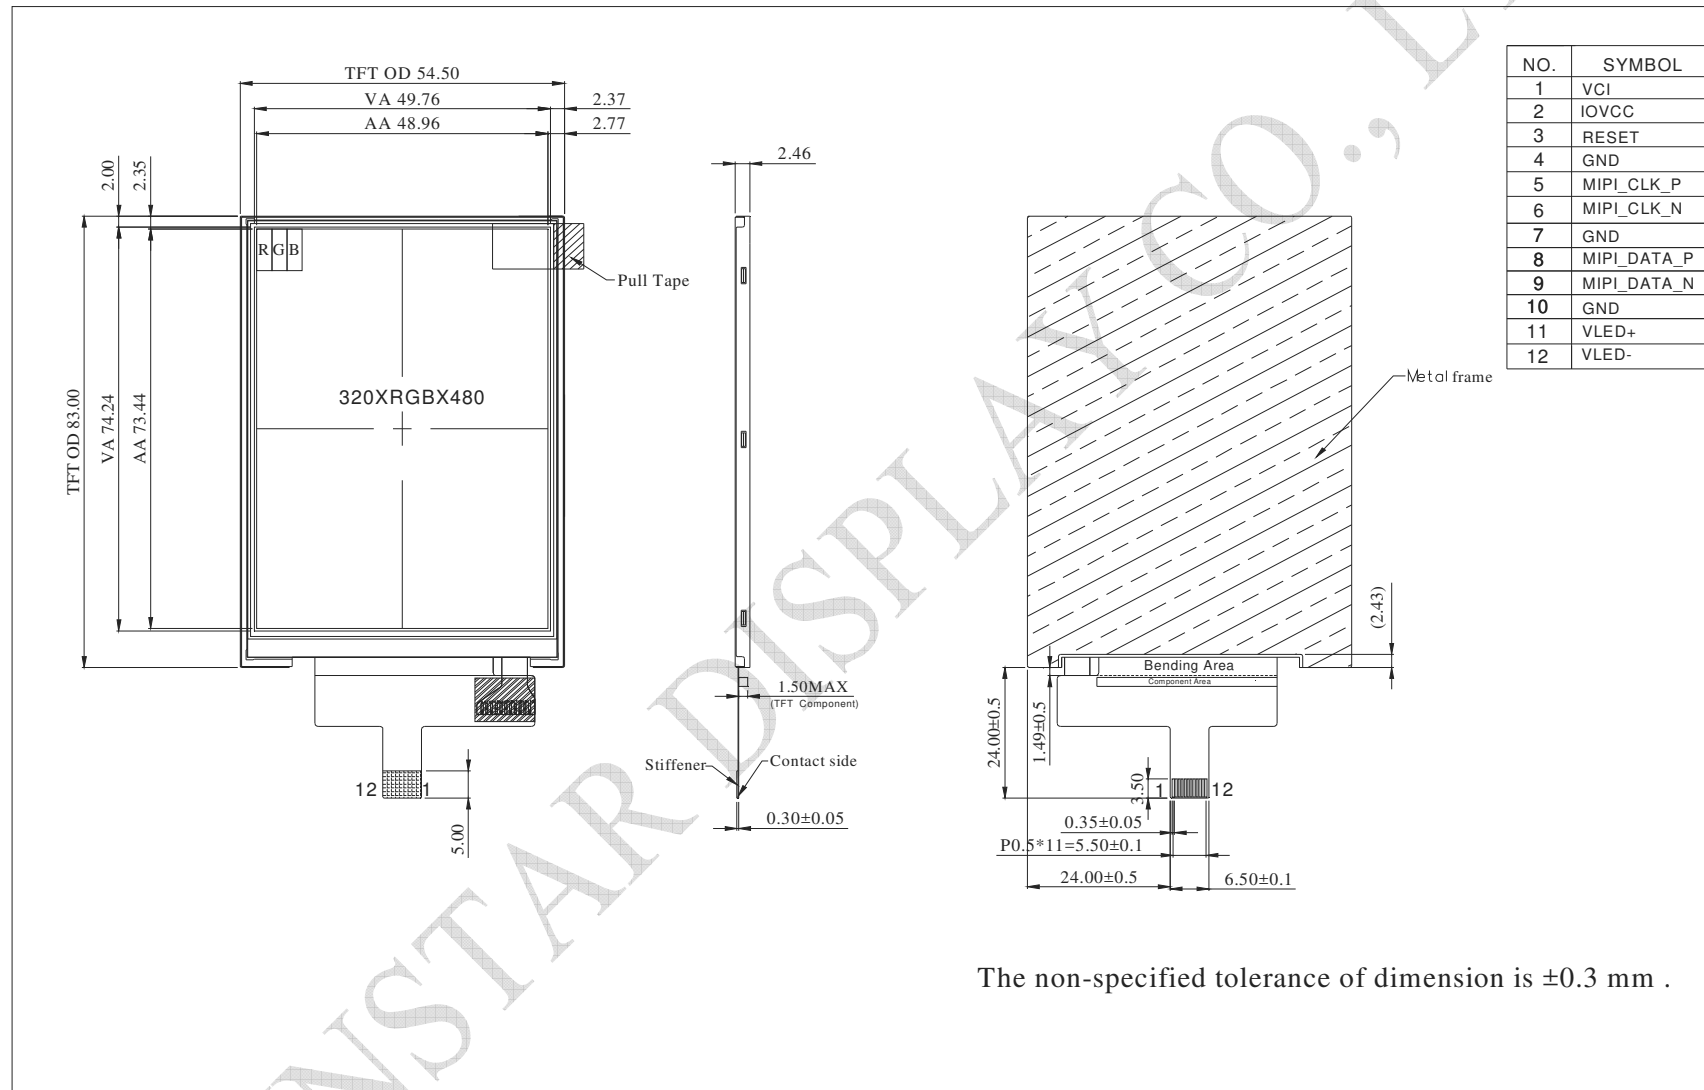

The non-specified tolerance of dimension is ± 0.3 mm .